IY65 | IY80 | IY105 | IY135

Softmount Washer-Extractor

FEATURES

- Stainless steel top, drum and tub and front panel, black side panel
- Patented soap hopper
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading
- Smart Drum : Extra mechanical action thanks to the cascading shape of the surface
- Smart Wave: Optimized water and detergent consumption

OPTIONS

- Coin operated
- Stainless steel side panels
- Liquid soap connection and pumps
- Water recovery kit
- Steam heating version
- 3rd water inlet

CONTROLS OPTIONS

- Evolis / Evolis Elite – fully programmable and customizable cycles 7” touch screen.
  - User-friendly screen with operating instructions built in as part of the control
  - Complete control content available in 34 languages
- Aries / Aries Elite – fully programmable control with 20 Pre-set programs and memory up to 99.
- Aries Micro – Programmable control with 6 programs (+2 cycle modifiers and Imbalance detection)



TOUCH CONTROL AVAILABLE
Multilingual user-friendly 7" touch control


500G EXTRACTION SPEED
Less moisture for a more efficient drying process

CLOUD-BASED PLATFORM
to easily monitor your laundry everywhere and at any time

YOUR SMART LAUNDRY PARTNER

		IY65	IY80	IY105	IY135
INNERDRUM					
Capacity 1:09	kg (lb)	7 (15)	8,5 (19)	12 (26)	15 (33)
Capacity 1:10	kg (lb)	6,5 (14)	7,5 (17)	10,5 (23)	13,5 (30)
Volume	litres	65	75	105	135
Diameter	mm	530	530	620	620
DRUM SPEED					
Wash	rpm	49	49	49	49
Extraction	rpm	1298	1298	1200	1151
G-FACTOR		500	500	500	460
HEATING					
Electricity	kW	3 - 7	3 - 7	3 - 7	3 - 9
Steam	bar	1 - 8	1 - 8	1 - 8	1 - 8
Hot water	°C	90	90	90	90
Sound pressure level	dB (A)	< 65	< 65	< 65	< 65
Water valves connection	BSP	3/4“	3/4“	3/4“	3/4“
Water pressure	kPa	100-600	100-600	100-600	100-600
Rec. water pressure	kPa	300-500	300-500	300-500	300-500
Water inlet	l/min	20	20	20	20
Drain valve	outer Ø mm	76	76	76	76
Flow amount with drain valve	l/min	210	210	210	210
Steam valve connection	BSP	1/2“	1/2“	1/2“	1/2“
Steam pressure	kPa	100-800	100-800	100-800	100-800
DIMENSIONS					
Size H×W×D	mm	1135×710×740	1135×710×790	1245×795×795	1245×795×945
Net weight	kg	170	185	210	255
TRANSPORT DATA					
Packed H×W×D	mm	1245×750×840	1245×750×840	1345×835×840	1345×835×985
Gross weight	kg	180	200	235	275

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	S	T	U	V	W	X	Y
IY65	612	564	710	24	349	1135	180	48	740	676	1030	1030	940	480	88	230	203	67	1030	42	293	390	218	113
IY80	612	564	710	24	349	1135	180	48	790	726	1030	1030	940	480	88	230	203	67	1030	42	293	390	218	113
IY105	648	600	795	24	342	1245	180	48	795	726	1140	1140	1050	506	88	230	203	67	1140	42	293	475	218	113
IY135	648	600	795	24	342	1245	180	48	945	876	1140	1140	1050	506	88	230	203	67	1140	42	293	475	218	113
			W			H				D														

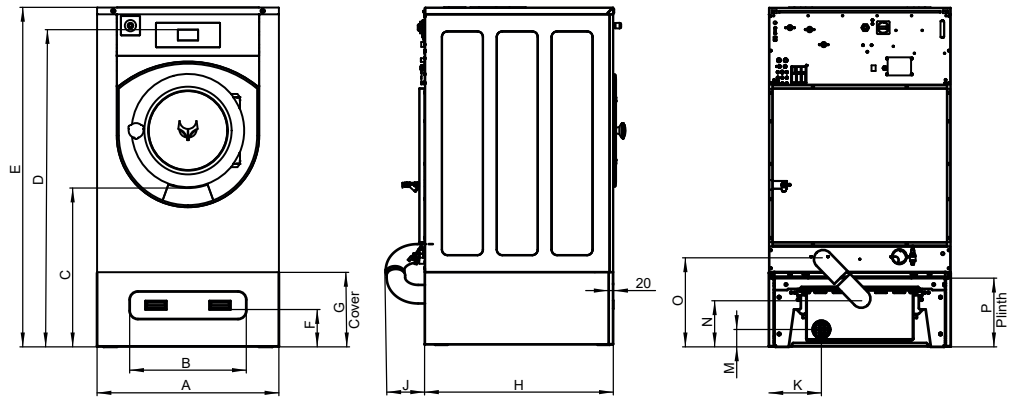

Front side Left side Rear side

1. Control panel
2. Soap dispenser
3. Central stop button
4. Steam connection
5. Air relieve
6. Liquid soap connection
7. Recycle water inlet
8. Recycled water valve cable inlet
9. Cold water inlet, soft
10. Cold water inlet, hard
11. Electrical connection
12. Hot water inlet
13. Main switch
14. Heating change-over switch
15. Liquid soap pump electrical connection
16. Fuses
17. USB port - optional
18. PC programming connection
19. Discharge water cable inlet
20. Drain valve - 3 in. [76 mm]
21. Water Sample - 1/2 in. (Applicable for wash bath sample-on request only)